



Husqvarna®



# HUSQVARNA TOOLING

# GUIDE

# CUT

## 600 SERIES



Available single and double segments in 20, 30, 50 and 100 grits and soft, Medium and hard bonds. A great value all round performer.

## 1400 SERIES



Available in single and double segments in 20, 30, 50 and 100 grits in extra soft, soft, Medium, hard and extra hard bonds. The shapes of these diamonds have been computer generated and refined by industry experts to provide the ultimate performance for each application. 20 and 30 grit extra hard are also available in triple's ideal for rain damaged and exposed driveways etc.

## SHARX



For fast and easy removal of dense surfaces on hard-troweled concrete floors. The metal bond ensures that the pads stay opened and sharp even on the hardest top layers. Compared to traditional grinding tools, SharX™ will get to the same level of aggregates exposure in less passes. Designed for use on Husqvarna's PG model series, together with the Redi Lock® system. With Redi Lock® you don't need any equipment to change the diamond tools. Available with single and double segments.

## BUSH HAMMERS



BHT tools have an extremely high stock removal capacity and can remove rigid or brittle coatings up to 10 mm in thickness. Can also be used to repair a failing cap on concrete or a slab that has been exposed to rain. Suitable for large floor grinders like PG 680 and PG 820. The BHT tools are available in 230 mm and 270 mm versions. The 270 mm version is available with three or six rolls.

# FILL

## GM 3000



New Formula GM3000 is specifically formulated for grouting and hole filling in concrete surfaces. Grouting is an essential part of any polished concrete floor and also an inherent part of the Hiperfloor process. The new formula is designed to speed up the process with a stronger concentrate that significantly increases the pin hole fill rate.

# HARDEN

## HIPERHARD POTASSIUM



Hiperhard is our most popular and commonly used densifier and is ideal for the initial flood coat. The use of Potassium Silicate as the carrier in this product makes it ideal for porous floors where the larger molecule helps to fill voids and cracks and is a very cost effective solution.

## HIPERHARD LITHIUM



HiPERHARD-L is formulated to fill and crystallize in the micro pores that conventional silicates (Sodium, Potassium etc ) miss. This creates a visually tighter / Higher Gloss finish, making for a more consistent finish across the entire polished concrete surface.

# REFINE

## FLEX TRANSITIONS



3" Copper transitional pad available in 50, 100 and 200 grit. Velcro backed, and attach's to standard resin holder disks. The perfect tool for removing Grout and Densifier and refining the floor prior to the polishing process. 3, 4 or 5 pads required per disk depending on machine size and application.

## Ceramics



3" Ceramic based pad available in 30,50, 100 and 200 grit. Velcro backed, and attach's to standard resin holder disks. Great for initial cut on minimal exposure floors and refining applications. 3, 4 or 5 pads required per disk depending on machine size and application.

## Durafloor



3" Wet machine pad available in 50, 100, 200, 400 and 800 grit. Velcro backed, and attach's to standard resin holder disks. A popular tool for refining concrete slabs where the application of water is not a concern.


## Hiperflex Transition Wet



Flex Transition, available in 9" and 10" machine pads in 50, 100 and 200 grits. Velcro backed rubber pads which attach to standard resin holder disks. These copper based pads must be used wet and provide the premium outcome when minimal to light exposure is required. The extra level of flexibility offered by the rubber backing and the 2" tooling size allows the tool to follow the contours of the floor, providing the perfect, uniform base for polished concrete.

# REFINE

## UltraGloss

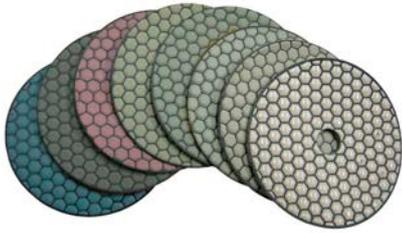

UltraGloss 5" hand polish pads are a more aggressive hand pad 50/100 grits giving a quicker cut when compared to UltraFloor MKII pads and do not transfer as much colour. Available in 50/100/200/400/800/1500 and 3000 grits.

# POLISH

## ULTRAFLOOR 3" MACHINE RESIN PADS



Resin based 3" machine pad available in 50, 100, 200, 400, 800, 1500 and 3000 grit Velcro backed which attach to standard resin holder disks. Compared to other traditional polishing pads, this series results in higher gloss and clarity levels, achieved in only one pass. This allows you to save time and tooling, resulting in a lower cost/sqm as well as a higher

## UltraFloor MKII



UltraFloor MKII 5" hand polish pads are designed to help with shine and colour matching the edges to the machine polished floor proper. Also great for touch ups and shine/colour matching low spots. Available 50/100/200/400/800/1500 and 3000 grits.

## HIPERFLEX DRY & WET PADS



Dry (FP40) fibre backed machine resin pads available in 9" and 10" and 200, 400, 800, 1500 and 3000 grits. The 2" resin size on a fibre pad allows the tooling to follow the contours while the fibre pad cleans the floor. These pads provide amazing gloss levels and will often allow you to finish one pass earlier I.E at 400 instead of 800 with obvious cost savings. Wet pads (FP80) are also available, ideal for resin based Terrazzo etc and where tooling heat is an issue.

## HIPERCLEAN MAINTENANCE/ TWISTER PAD



Hiperclean diamond impregnated maintenance pads attach to standard resin holder disks and are available in 9" and 10" and 400, 800, 1500 and 3000 grit. Designed for maintenance on existing polished concrete floors. Also widely used to clean the floor before applying a sealer.

# SEAL

## Greenseal



HiPERGUARD GREEN SEAL is a water based surface impregnator, lining the pours of concrete to create extra chemical resistance. Suggested use 400 grit and lower. Easy cleaning and repair. Low VOC

## HIPERGUARD Enhance plus



HiPERGUARD Enhance plus is a concrete Impregnating Sealer. A Solvant based premium impregnator used at the final stage of the Hiperfloor process. It penetrates the micro pores and concrete capillaries of the surface lining, increasing the surface tention and restricts the absorbtion of water, oil, fats and stains.

## SEALER BUFF PAD



Sealer Buff pads attach to standard resin holder disks and are available in 9" and 10". A fibre pad designed to remove any excess sealer and to Buff and clean the floor.